
# **Shoe Covers**



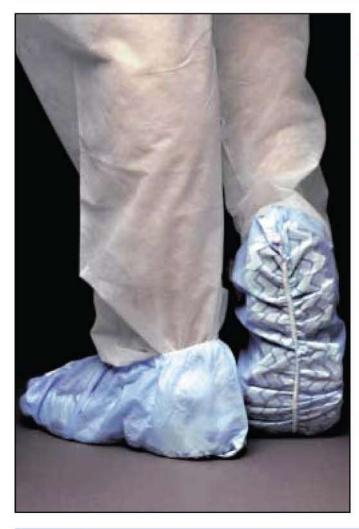

# Ultraguard)

# Shoe Covers

Advantage Shoe Covers are made of 100% spunbond polypropylene. This non-woven fabric helps filter particulates for contamination control in critical environments. The Regular Sole Shoe Covers are available in universal or extra large sizes with comfortable elastic ankles to fit over most shoes. Skid-Free Soles are available for greater traction and improved safety.

**Polylatex Shoe Covers** are seamless and are made of a lint-free polylatex film. These covers offer outstanding liquid protection when a low particulate material is needed in cleanroom environments. Available in universal or extra large sizes.

**Polyethylene Shoe Covers** are made of a low density polyethylene film making them liquid impervious and lint-free. These shoe covers are an economical alternative when a low particulate material is needed to protect against splash. Universal and extra large sizes are available.

**Applications:** Medical, dental, cleanroom, critical envirnment, food handling/production, industrial manufacturing, construction, and general maintenance.

# **Specifications**

## Advantage Shoe Cover

- Made of Non-Woven, Spun Bond Fabric
- Material Weight......40 gm/m<sup>2</sup>
- Low Top Design
- Universal and Extra Large Sizes
- Skid-Free Available
- Extra-Light

### **Polylatex Shoe Cover**

- Low Particulate
- Low Top Design
- Durable
- Universal and Extra Large Sizes
- Splash Protection

#### Two Tone

- Shine Finish
- Smooth

#### Clopay

- Matte Finish
- Light Texture

## **Polyethylene Shoe Cover**

- Low Particulate
- Low Top Design
- Economical
- Universal and Extra Large Sizes
- Splash Protection



1505 Corporate Woods Pkwy, Suite 500 Uniontown, OH 44685 info@plxindustries.com

# **Shoe Covers**





#### Polypropylene Shoe Covers

Product No.	Description	Colors	QTY/CASE
APP0330-RS	Regular Sole, Bagged	Blue, White	300
APP0330-RS-BOX	Regular Sole, Boxed	Blue, White	300
APP0330-RS-XL	Regular Sole, Bagged,X-Large	Blue, White	300
APP0330-RS-XL-BOX	Regular Sole, Boxed, X-Large	Blue, White	300
APP0330-SF	Skid-Free, Bagged	Blue, White	300
APP0330-SF-BOX	Skid-Free, Boxed	Blue, White	300
APP0330-SF-XL	Skid-Free, Bagged, X-Large	Blue, White	300
APP0330-SF-XL-BOX	Skid-Free, Boxed, X-Large	Blue, White	300



#### Polylatex Shoe Covers

Product No.	Description	Colors	QTY/CASE
APP0330-LTX	Two-Tone, Bagged	Blue	300
APP0330-LTX-XL	Two-Tone, X-Large, Bagged	Blue	300
APP0330-PLCS	Two-Tone With Conductive Strip	Blue	300
APP0330-LTX-PEVA	Clopay, Bagged	Blue	300
APP0330-LTX-PEVA-XL	Clopay, X-Large, Bagged	Blue	300



#### Polyethylene Shoe Covers

Product No.	Description	Colors	QTY/CASE
APP0330-ETH	Bagged	Blue	1,000
APP0330-ETH-XL	X-Large, Bagged	Blue	1,000



Special Order Colors Include:

Polypropylene Regular Sole and Skid Free - Green. Polylatex - White.

#### Additional



#### Items Include:

Advantage

Coveralls Lab Coats Isolation Gowns Bouffant Caps Shoe Covers Face Masks Tyvek

Coveralls Frocks Lab Coats Aprons Sleeves Shoe Covers Bouffant Caps

Advantage Plus Aprons

Coveralls Lab Coats Isolation Gowns Shoe Covers

Advantage Pro Coveralls

Lab Coats Isolation Gowns Shoe Covers

Polyethylene

Aprons Gloves Sleeves Shoe Covers Shower Caps Rain Coats Ponchos

# Disposable Conductive Strip Shoe Covers Also Available.





# **TECHNICAL DATA SHEET**

#### **SHOE COVERS**

Product Code: APP0330-SFB/W/G APP0330-RSB/W/G

Colors Available: Blue, White, Green, Multi

Sizes Available: Universal Extra Large

Packing: Poly Bag or Dispenser Box

100 pieces per bag/box

3 bags/boxes or 300 pieces per case

Specifications

Material: Polypropylene

 Dimension:
 Universal
 Extra Large

 a) Length:
 13"
 18"

 b) Width:
 6 ½"
 8"

 c) Ave. Weight (g):
 40 gram/m²
 40 gram/m²

Particle Testing

Test Method: Helmke Drum Method IES-RP-CC003.2. Garment system

considerations for cleanroom and other controlled environments.

Procedure: The samples were tested per IES-RP-CC003.2 by the tumbling

method (Helmke Drum). Each sample was tumbled for 10 minutes. The results show the average particles released per

1

minute per cubic foot of air.

> 10.0



800-978-4299

Local: 330-896-7373 Fax: 330-899-0407 www.plxindustries.org



## MATERIAL SAFETY DATA SHEET

#### POLYPROPYLENE ITEMS

Identification

Product Description: PolypropyleneNonwovens- All weights and colors of

untreated polypropylene fabric

Chemical and Common Name: Polypropylene- (CH -CH -CH)

Appearance and Odor: Bonded nonwoven fabric, white and various colors.

No odor.

Typical Physical & Chemical Characteristics

Volatile (vol) %: Less than 0.4

Solubility in Water: Negligible

Specific Gravity: 0.88-0.92

Fire and Explosion

Flash Point: Above 650°F

Autoignition Temperature: Greater than 700°F

Extinguishing Media: Agents approved for Class A fires

Special Firefighting

Procedures:

Standard procedures for Class A fires. Use water spray to cool fire-exposed surfaces. Protect personnel with usual precautions including use of self-contained breathing apparatus for smoke and

oxygen depletion.

Incompatibility: Avoid excessive heat, strong oxidizers, aoids, and

caustics.

Hazardous Decomposition

Products: Carbon Monoxide, Carbon Dioxide

Hazardous Polymerization: Will not occur



800-978-4299

Local: 330-896-7373 Fax: 330-899-0407 www.plxindustries.org



## MATERIAL SAFETY DATA SHEET

#### POLYPROPYLENE APPAREL ITEMS (continued)

Spill Procedures & Waste Disposal

Spill Procedures: If material is not contaminated, return to proper

package for use. If material is contaminated, place

in proper container for disposal.

Waste Disposal Method: Sweep up waste fabric and recycle, incinerate or

landfill in conformity to local disposal regulations.

**Other Precautions** 

Storage: Store nonwoven fabric in a warehouse equipped

with a sprinkler system. Do not store near flame, heat or strong oxidants, such as hot or concentrated

nitric acid or fuming sulfuric acid.

**Exposure Data** 

Eyes: Safety glasses should be worn when performing any

industrial operation.



1505 Corporate Woods Pkwy, Suite 500 Uniontown, OH 44685 info@plxindustries.com